



PHYSICS

BOOKS - TARGET PHYSICS (HINGLISH)

COMMUNICATION SYSTEMS

Classical Thinking

1. Major parts of communications systems are:

A. transmitter and receiver.

B. receiver and communication channel.

C. transmitter and communication channel.

D. transmitter, receiver and communication channel.

Answer: D



Watch Video Solution

2. A receiver reconstructs the original message after propagation through the channel. It

A. may be true

B. may be false

C. sometimes true and sometimes false

D. is certainly true

Answer: D



Watch Video Solution

3. Quality of transmission depends upon

A. nature of medium only

B. nature of signal only

C. both (A) and (B)

D. neither (A) nor (B)

Answer: C



Watch Video Solution

4. The loss of strength of a signal while propagating through a medium is known as

A. modulation

B. demodulation

C. attenuation

D. amplification

Answer: C



Watch Video Solution

5. Sound produced by a tuning fork is a sort of

:-

A. digital signal

B. analog signal

C. both (A) and (B)

D. neither (A) nor (B)

Answer: B



Watch Video Solution

6. A _____ converts signal produced by source of information into suitable transmission form.

A. channel

B. transducer

C. transmitter

D. modem

Answer: C



Watch Video Solution

7. Modem is used to

A. modulate the digital signals

B. convert analog signals to digital ones

C. modulate amplitude

D. modulate frequency

Answer: B



Watch Video Solution

8. Point to point communication requires the use of

A. a guided medium only

B. unguided medium only

C. any medium

D. none of these

Answer: A



Watch Video Solution

9. Maximum distance between source and destination is called

A. band width

B. range

C. band energy

D. modulating index

Answer: B



Watch Video Solution

10. In amplification process,

A. amplitude of signal increases.

B. amplitude of signal decreases.

C. frequency of signal increases.

D. frequency of signal decreases.

Answer: A



Watch Video Solution

11. Range of communication is extended by using

A. transmitter

B. transducer

C. processor

D. repeater

Answer: D



Watch Video Solution

12. The radio waves for frequency 30 MHz to 300 MHz belong to

A. high frequency band.

B. very high frequency band.

C. ultra high frequency band.

D. super high frequency band.

Answer: B



Watch Video Solution

13. In optical fibre refractive index of core is

A. less than R.I of cladding

B. more than R.I of cladding

C. equal to R.I. of cladding

D. half of R.I. of cladding

Answer: B



Watch Video Solution

14. The frequency used in TV and radar system lies in

A. very high frequency

B. ultra high frequency

C. extremely low frequency

D. very low frequency

Answer: B



Watch Video Solution

15. Bandwidth of optical fibre communication is

A. 10^6 to 10^9 Hz

B. 10^{13} to 10^{15} Hz

C. 10^9 to 10^{11} Hz

D. none of these

Answer: B



Watch Video Solution

16. Downlink frequency bands in case of communication satellite are

A. 5 . 925 to 6 . 425 GHz

B. 88 to 108 MHz

C. 3 . 7 to 4 . 2 GHz

D. 174 to 216 MHz

Answer: C



Watch Video Solution

17. Audio signals cannot be directly transmitted into to space because

A. audio signals cannot propagate through air.

B. audio signal are high frequency signals.

C. audio signals need some external help for propagation.

D. a very high antenna is needed for their propagation.

Answer: D



Watch Video Solution

18. Which of the following is digital modulation technique?

A. PCM

B. PAM

C. PPM

D. PDM

Answer: A



Watch Video Solution

19. Which of the following is used for analog to digital conversion ?

A. Amplitude of modulation

B. Pulse code modulation

C. Frequency modulation

D. Phase modulation

Answer: B



Watch Video Solution

20. In pulse modulation o analog signals, common pulse systems employed are

A. Pulse amplitude modulation (PAM)

B. pulse position and pulse duration modulation (PPM and PDM).

C. pulse code modulation (PCM).

D. all of the above.

Answer: D



Watch Video Solution

21. Practical sampling is mostly done by

A. PCM

B. PDM

C. PAM

D. PPM

Answer: C



Watch Video Solution

22. The modulation as well as band-width increases in case of

A. AM

B. FM

C. VSB

D. DSB

Answer: B



Watch Video Solution

23. For efficient transmission, transmitting antenna has length comparable to

A. $\frac{\lambda}{2}$

B. $\frac{\lambda}{4}$

C. λ

D. $\frac{\lambda}{2}$ or integral multiple of $\frac{\lambda}{2}$

Answer: B



Watch Video Solution

24. Basically, the product modulator is

A. an amplifier

B. a mixer

C. a frequency separator

D. a phase separator

Answer: B



Watch Video Solution

25. What type of modulation is employed in india for radio transmission

A. Amplitude modulation

B. frequency modulation

C. Pulse modulation

D. Phase modulation

Answer: A



Watch Video Solution

26. When the modulating frequency is doubled, the modulation index is halved and the modulating voltage constant the modulation system is

A. amplitude modulation

B. phase modulation .

C. frequency modulation

D. all of the above.

Answer: C



Watch Video Solution

27. Which of the following is NOT the drawback of AM ?

A. Low efficiency

B. Noisy reception

C. Small operating range

D. High operating voltage

Answer: D



Watch Video Solution

28. Which one of the following represents rectified wave ?

A. 

B. 

C. 

D. 

Answer: B



[View Text Solution](#)

29. In space communication, the sound waves can be sent from one place to another

A. through space.

B. through wires.

C. by superimposing it on undamped
electromagnetic waves.

D. by superimposing it on damped
electromagnetic waves.

Answer: C



Watch Video Solution

30. Long distance short-wave radio broadcasting uses

A. sky wave

B. ground wave

C. space wave

D. ionospheric wave

Answer: D



Watch Video Solution

31. Space wave propagation is used in

(a) microwave communication

(b) satellite communication

(c) TV transmission

A. television communication

B. radar communication

C. microwave communication

D. all of these

Answer: D



Watch Video Solution

32. When electromagnetic waves enter the ionised layer of ionosphere, then the relative permittivity i.e. dielectric constant of the ionised layer

A. does not change

B. appears to increase

C. appears to decrease

D. sometimes appears to increase and sometimes to decrease

Answer: C



Watch Video Solution

33. The layer that adsorbs largest proportion of UV rays is

- A. ozone layer
- B. troposphere
- C. ionosphere
- D. mesosphere

Answer: A



Watch Video Solution

34. In the earth's atmosphere, the following order of layers are present for the propagation of E.M waves:

A. Troposphere, stratosphere, appleton layer, thermosphere.

B. Stratosphere, appleton layer, thermosphere, troposphere.

C. Stratosphere, troposphere,
thermosphere appleton layer.

D. Troposphere, mesosphere,
thermosphere, appleton layer.

Answer: D



Watch Video Solution

35. Ozone layer above earth's atmosphere will
not

A. prevent infrared radiations from sun reaching earth.

B. prevent infra red radiations originated from earth from escaping earth's atmosphere.

C. prevent ultraviolet rays from sun.

D. reflect back radio waves.

Answer: D



Watch Video Solution

36. Which of the following statements is correct ?

A. E-layer is the top layer in atmosphere.

B. F-layer is the top layer in atmosphere.

C. Ionosphere is not a combination of E and F layer.

D. Troposphere is the top layer.

Answer: B



Watch Video Solution

37. Which of the ionospheric layer disappears during night ?

A. F_1 layer

B. F_2 layer

C. E - layer

D. D-layer

Answer: D



Watch Video Solution

38. The region that contains free electrons, negative ions and positive ions is

A. troposphere

B. mesosphere

C. ionosphere

D. stratosphere

Answer: C



Watch Video Solution

39. UHF is used in

- A. tropospheric scatter
- B. stratospheric scatter
- C. ionospheric scatter
- D. mesospheric scatter

Answer: A



Watch Video Solution

40. The maximum distance upto which TV transmission from a TV tower of height h can be received is proportional to

A. $h^{1/2}$

B. h

C. $h^{3/2}$

D. h^2

Answer: A



Watch Video Solution

41. Radio waves which are vertically polarised can travel as

A. space wave

B. sky wave

C. ground wave

D. carrier wave

Answer: C



Watch Video Solution

42. Energy loss in case of ground wave propagation is due to

- A. reflection of ground wave.
- B. refraction of ground wave.
- C. induced current in ground.
- D. induced positive charge in ground.

Answer: C



Watch Video Solution

43. Ground wave propagation is suitable for

A. low frequency and medium frequency

B. high frequency

C. ultra frequency

D. infrafrequency

Answer: A



Watch Video Solution

44. Select the wrong statement.

EM waves

- A. are transverse in nature.
- B. travel in free space at a speed of light.
- C. are produced by accelerating charges.
- D. travel in all media with same speed.

Answer: D



Watch Video Solution

45. The EM waves when travel into different medium gets

A. refracted

B. transmitted

C. reflected

D. emitted

Answer: A



Watch Video Solution

46. Fading applies to:

A. tropospheric propagation

B. Faraday rotation

C. ionospheric propagation

D. atmospheric storms

Answer: A



Watch Video Solution

47. Through which mode of propagation, the radio waves can be sent from one place to another

A. Ground wave propagation

B. Sky wave propagation

C. Space wave propagation

D. All of these

Answer: D



Watch Video Solution

48. The component of the ground wave more likely to be attenuated by conducting earth is

A. horizontal

B. vertical

C. both horizontal and vertical

D. inclined at 45°

Answer: A



Watch Video Solution

49. Fading is the variation in the strength of a signal at a receiver due to

- A. interference of waves.
- B. diffraction of waves.
- C. polarisation of waves.
- D. reflection of waves.

Answer: A



Watch Video Solution

50. In satellite communication, the communication satellite.

A. acts as a reflector for a beam of modulated microwave from transmitter sent directly towards it.

B. acts as a repeater for signal reaching there, without any change in frequency

C. receives the coming modulated returns it to earth at a different frequency .

D. none of these

Answer: C



Watch Video Solution

51. Which one of the following is correct ?

A. A single geostationary satellite can cover the whole part of the earth for microwave communication.

B. At least three geostationary satellites in the same orbit around earth can cover the whole part for microwave communication.

C. The first Indian communication satellite is Apple.

D. The satellite communication is not like the line of sight microwave communication .

Answer: B



Watch Video Solution

52. The satellite that seems stationary w.r.t. Earth is

- A. intelsat satellite
- B. geostationary satellite
- C. telstar
- D. marisat

Answer: B



53. Speed of electromagnetic waves is given

A. $c = \frac{1}{\sqrt{\mu_0 \epsilon_0}}$

B. $c = \sqrt{\mu_0 \epsilon_0}$

C. $c = \frac{1}{\mu_0 \epsilon_0}$

D. $c = \mu_0 \epsilon_0$

Answer: A



Watch Video Solution

54. The highest frequency of radio waves which when sent at some angle towards the ionosphere, gets reflected from ionosphere and returns to earth is called

- A. critical frequency
- B. maximum usable frequency
- C. ultrahigh frequency
- D. Very high frequency

Answer: B



Watch Video Solution

55. Broadcast band in which FM lies is

A. UHF

B. VHF

C. SHF

D. none of these

Answer: B



Watch Video Solution

56. The reception of television signals is possible by using

A. sky wave propagation.

B. communication geostationary satellite.

C. polar satellite.

D. tall antenna which may directly intercept the signals coming from transmitting antenna.

Answer: D



Watch Video Solution

57. General communication is NOT preferred over optical wire communication because

- A. it can be easily tapped.
- B. it is more efficient.
- C. it has signal security.
- D. it cannot be jammed as easily as radio waves.

Answer: A



Watch Video Solution

58. Assertion : communication in UHF/ VHF regions can be established by space wave of tropospheric wave .

Reason : Communication in UHF/ VHF regions is limited to line of sight distance.

A. Assertion is True, Reason is True :

Reason is a correct explanation for

Assertion

B. Assertion is True, Reason is True, Reason is not a correct explanation for Assertion .

C. Assertion is True, Reason is False .

D. Assertion is False but, Reason is True .

Answer: B



Watch Video Solution

59. Assertion: A dish antenna is highly directional.

Reason: This is because a dipole antenna omnidirectional.

A. Assertion is True, Reason is True : Reason

is a correct explanation for Assertion .

B. Assertion is True, Reason is True, Reason

is not correct explanation for Assertion .

C. Assertion is True, Reason is False .

D. Assertion is False but, Reason is True.

Answer: B



Watch Video Solution

Critical Thinking

1. The losses in transmission lines are

- A. radiation losses
- B. conductor heating
- C. Dielectric heating

D. all of these

Answer: D



Watch Video Solution

2. Basic components of a transmitter are:

A. message signal generator and antenna.

B. modulator and antenna.

C. signal generator and modulator .

D. message signal generator, modulator
and antenna.

Answer: D



Watch Video Solution

3. A communication between a fixed base station and several mobile units, located on ships or aircraft utilising two way radio communication in the VHF and UHF is of frequency band

- A. 3 to 30 MHz
- B. 30 to 300 MHz
- C. 30 to 470 MHz
- D. 30 to 600 MHz

Answer: C



Watch Video Solution

4. Give an expression for band-width in AM transmission.

A. maximum frequency of audio signal

B. minimum frequency of audio signal.

C. twice the maximum frequency of audio
signal

D. half the maximum frequency of audio
signal.

Answer: C



Watch Video Solution

5. The bandwidth requirement of telephone channel is

A. 3 kHz

B. 5 kHz

C. 10 Hz

D. 15 kHz

Answer: A



Watch Video Solution

6. The transmission band width in wide band frequency modulation is

A. independent of message band width.

B. dependent of message band width.

C. both (A) and (B)

D. none of these.

Answer: A



Watch Video Solution

7. In FM broadcast in VHF band, channel width is

A. 50

B. 100

C. 200

D. 400

Answer: C



Watch Video Solution

8. Satellite communication uses _____
frequency bands for uplink

A. 5.925 to 6.425 GHz

B. 3.7 to 4.2 GHz

C. 840 to 935 MHz

D. 420 to 890 MHz

Answer: A



Watch Video Solution

9. In optical fibre, propagation angle of light must be less than or equal to

- A. incident angle
- B. refraction angle
- C. reflection angle
- D. critical angle

Answer: D



Watch Video Solution

10. In amplitude modulated wave, power content of the carrier is maximum when μ is

A. 0

B. 1

C. 0.2

D. 0.3

Answer: A



Watch Video Solution

11. A modulated signal is represented as

$$x(t) = 6 \sin 1250 t + \sin 10^8 t$$
 then the

modulating index is

A. 10

B. 1250

C. 10^8

D. 6

Answer: D



Watch Video Solution

12. The number of AM broadcast stations that can be accommodated in a $300kHz$ bandwidth for the highest modulating frequency $15kHz$ will be

A. 10

B. 5

C. 7

D. 12

Answer: A



Watch Video Solution

13. The audio signal used to modulate

$30 \sin (2\pi \times 10^6 t)$ is $15 \sin 300 \pi t$. The

depth of modulation of

A. 0.15

B. 0.25

C. 0.3

D. 0.5

Answer: D



Watch Video Solution

14. What is the modulation index of an over modulated wave

A. 1

B. Zero

C. < 1

D. > 1

Answer: D



Watch Video Solution

15. If a number of sine waves with modulation indices $n_1, n_2, n_3 \dots$ modulate a carrier wave, then total modulation index (n) of the wave is

A. $n_1 + n_2 \dots + 2(n_1 + n_2 \dots)$

B. $\sqrt{n_1 - n_2 + n_3 \dots}$

C. $\sqrt{n_1^2 + n_2^2 + n_3^2 \dots}$

D. $\sqrt{n_1 + n_2 + \dots}$

Answer: C



Watch Video Solution

16. Sinusoidal carrier voltage of frequency $1.5MHz$ and amplitude $50V$ is amplitude modulated by sinusoidal voltage of frequency $10kHz$ producing 50% modulation. The lower and upper side-band frequencies in kHz are

A. 1490, 1510

B. 1510, 1490

C. $\frac{1}{1490}$, $\frac{1}{1510}$

D. $\frac{1}{1510}$, $\frac{1}{1490}$

Answer: A



Watch Video Solution

17. In space communication , the information can be passed from one place to another at a distance of 100 km in

A. 1 s

B. 0.5 s

C. 0.0033 s

D. 0.00033 s

Answer: D



Watch Video Solution

18. The maximum usable frequency in F-layer with original frequency in 50 MHz will be

A. 181 MHz

B. 150 MHz

C. 250 MHz

D. 300 MHz

Answer: A



Watch Video Solution

19. In which of the region of earth's atmosphere temperature decreases with height?

A. Troposphere

B. Mesosphere

C. Stratosphere

D. Ionsosphere

Answer: D



Watch Video Solution

20. If the frequency of E.M radiations is halved then the energy of EM radiation will become

A. double

B. remains unchanged

C. becomes half

D. becomes one fourth

Answer: C



Watch Video Solution

21. The sky wave propagation is suitable for radiowaves of frequency

A. upto 3 MHz

B. from 3 MHz to 20 MHz

C. from 3 MHz to 30 MHz

D. from 3 MHz to 200 MHz

Answer: C



Watch Video Solution

22. mesosphere reflects which of them following type of wave, particularly at night ?

A. Low frequency

B. High frequency

C. Very high frequency

D. Ultra high frequency

Answer: B



Watch Video Solution

23. A geo-synchronous satellite is:

A. is located at a height of 34860 km to ensure global coverage.

B. appears stationary over a place on earth's magnetic pole.

C. is not really stationary at all but orbits the earth within 24 hours.

D. is always at a fixed location in space and simply spins about its own axis.

Answer: C



Watch Video Solution

24. The height of a T.V. tower is 300 m. What is the maximum distance upto which T. V. signals can be received ? ($R = 6400$ km)

A. 50 km

B. 55 km

C. 62 km

D. 75 km

Answer: C



Watch Video Solution

25. Electromagnetic waves of frequencies higher than $9\sqrt{2}$ MHz are found to be not reflected by the ionosphere on a particular day at a place. The maximum electron density in the ionosphere is :

A. $\sqrt{2} \times 10^{12} / m^3$.

B. $\sqrt{5} \times 10^{12} / m^3$.

C. $2 \times 10^{12} / m^3$.

D. $3 \times 10^{12} / m^3$.

Answer: C



Watch Video Solution

26. The maximum line-of-sight distance d_M between two antennas having heights h_T and h_R above the earth is

A. $\sqrt{2R} (h_T + h_R)$

B. $2R\sqrt{(h_T + h_R)}$

C. $\sqrt{2R(h_T + h_R)}$

D. $\sqrt{2R}(\sqrt{h_T} + \sqrt{h_R})$

Answer: D



Watch Video Solution

27. A transmitting antenna at the top of a tower has a height of 50 m and the height of the receiving antenna is 32 m. What is the maximum distance between them for satisfactory communication in line of sight mode ?

(Radius of the earth (R) = 6.4×10^6 m) ($\sqrt{10}$ = 3.16)

A. 75.5 km

B. 65.5 m

C. 55.5 km

D. 45.5 km

Answer: D



Watch Video Solution

28. When an electromagnetic wave enters the ionised layer of ionosphere, the motion of electron cloud produces a space current and

the electric field has its own capacitive displacement current then.

A. The space current is in phase with displacement current.

B. The space current lags behind the displacement current by a phase of 180° .

C. the space current lages behind the displacement current by a phase of 90° .

D. the space current leads the

displacement current by a phase of 90° .

Answer: D



Watch Video Solution

29. for the first pair of side band frequencies,
band width required for amplitude
modulation is

A. $f_c + f_m$

B. $f_c - f_m$

C. $2 f_m$

D. none of these

Answer: C



Watch Video Solution

30. In FM, frequency deviation is

A. inverely proportional to amplitude of modulating signal.

B. Proportional to frequency of modulating signal .

C. directly proportional to amplitude and inversely proportional to the frequency of the modulating signal .

D. not in amplitude.

Answer: B



Watch Video Solution

31. Consider an optical communication system operating at $\lambda = 800nm$. Suppose, only 1 % of the optical source frequency is the available channel bandwidth for optical communication. How many channels can be accommodated for transmitting audio signals requiring a bandwidth of $8kHz$

A. 4.7×10^8

B. 48

C. 6.2×10^8

$$D. 4.8 \times 10^5$$

Answer: A



Watch Video Solution

32. A telephone link operating at a center frequency of $10GHz$ is established. If 1% of this is available then how many telephone channels can be simultaneously given when each telephone covering a band width of $5kHz$?

A. 2×10^4

B. 2×10^6

C. 5×10^4

D. 5×10^6

Answer: A



Watch Video Solution

33. Assertion : FM broadcast is preferred over AM broadcast .

Reason : Process of combining the message

signals with carrier wave is called demodulation .

A. Assertion is True, Reason is True, Reason

is a correct explanation for Assertion

B. Assertion is True, Reason is True, Reason

is not correct explanation for Assertion

C. Assertion is true, Reason is false .

D. Assertion is false, Reason is true .

Answer: C



Watch Video Solution

34. Assertion : Higher the modulation index the reception will be strong and clear.

Reason : The degree, to which the carrier wave is modulated is called modulation index.

A. Assertion is True, Reason is True, Reason is a correct explanation for Assertion

B. Assertion is True, Reason is True, Reason is not a correct explanation for Assertion

C. Assertion is True, Reason is False .

D. Assertion is False but, Reason is True.

Answer: B



Watch Video Solution

Competitive Thinking

1. The process of regaining of information from carrier wave at the receiver is termed as

A. demodulation

B. modulation

C. attenuation

D. amplification

Answer: A



Watch Video Solution

2. In communication system, the process of superimposing a low frequency signal on a high frequency wave is known as

A. Repeater

B. Attenuation

C. Modulation

D. Demodulation

Answer: C



Watch Video Solution

3. The range of frequency of audio signal is

_____.

A. 0 to 2 KHz

B. 20 Hz to 20 MHz

C. 20 Hz to 20 kHz

D. 20 kHz to 200 kHz

Answer: C



Watch Video Solution

4. The radio waves of frequency 300MHz to 3000MHz belong to

- A. High frequency band
- B. very high frequency band.
- C. ultra high frequency band.
- D. super high frequency band.

Answer: C



Watch Video Solution

5. For television broadcasting, the frequency employed is normally

A. 30-300 MHz

B. 30-300 GHz

C. 30-300 KHz

D. 30-300 Hz

Answer: A



Watch Video Solution

6. Range of frequencies allotted for commercial *FM* radio broadcast is

A. 88 to 108 MHz

B. 88 to 108 kHz

C. 8 to 88 MHz

D. 88 to 108 GHz

Answer: A



Watch Video Solution

7. Consider telecommunication through optical fibres. Which of the following statements is not true?

A. Optical fibres may have homogeneous core with a suitable cladding.

B. Optical fibres can be of graded refractive index.

C. Optical fibres are subjected to electromagnetic interference from outside.

D. Optical fibres have extremely low transmission loss.

Answer: C



Watch Video Solution

8. An optical fibre can offer a band width of _____.

A. 100 MHz

B. 100 GHz

C. 750 MHz

D. 250 MHz

Answer: B



9. the attenuation in optical fibre is mainly due to

A. absorption

B. scattering

C. neither absorption nor scattering

D. both (A) and (B)

Answer: D



10. 1000 kHz carrier wave is amplitude modulated by the signal frequency 200-4000Hz . The channel width of this case is

A. 8 kHz

B. 4kHz

C. 7.6 k Hz

D. 3.8 kHz

Answer: A



Watch Video Solution

11. Broadcasting antennas are generally

A. omnidirectional type

B. vertical type

C. horizontal type

D. oblique type

Answer: B



Watch Video Solution

12. Identify the incorrect statement from the following

A. AM detection is carried out using a rectifier and an envelope detector .

B. Pulse position denotes the time of rise or fall of the pulse amplitude .

C. Modulation index μ is kept ≥ 1 , to avoid distortion.

D. Facsimile (FAX) scans the contents of the document to create electronic signals.

Answer: C



Watch Video Solution

13. Amplitude modulation has

A. one carrier with infinite frequencies.

B. one carrier with two side band frequencies.

C. one carrier with high frequency.

D. one carrier.

Answer: B



Watch Video Solution

14. In amplitude modulation

A. amplitude remains constant but

frequency changes

B. both amplitude and frequency do not

change

C. both amplitude and frequency change

D. amplitude of the carrier wave changes
according to information signal

Answer: D



Watch Video Solution

15. In frequency modulation

A. the amplitude of modulated wave varies
as frequency of carrier wave .

B. the frequency of modulated wave varies as amplitude of modulating wave .

C. the amplitude of modulated wave varies as amplitude of carrier wave.

D. the frequency of modulated wave varies as wavelength of modulating wave.

Answer: B



Watch Video Solution

16. In amplitude modulation, the bandwidth is

- A. twice the audio signal frequency.
- B. thrice the audio signal frequency .
- C. thrice the carrier wave frequency.
- D. twice the carrier wave frequency .

Answer: A



Watch Video Solution

17. Choose the correct statement:

A. In amplitude modulation, the frequency of the high frequency carrier wave is made to vary in proportion to the amplitude to the audio signal.

B. In frequency modulation, the amplitude of the high frequency carrier wave is made to vary in proportion to the amplitude of the audio signal.

C. In frequency modulation, the amplitude of the high frequency carrier wave is made to vary in proportion to the frequency of the audio signal .

D. In amplitude modulation, the amplitude of the high frequency carrier wave is made to vary in proportion to the amplitude of the audio signal .

Answer: D



Watch Video Solution

18. In amplitude modulation, sinusoidal carrier frequency used is denoted by ω_c and the signal frequency is denoted by ω_m . The bandwidth ($\Delta\omega_m$) of the signal is such that $\Delta\omega_m < \omega_c$. Which of the following frequency is not contained in the modulated wave.

A. $\omega_m + \omega_c$

B. $\omega_c - \omega_m$

C. ω_m

D. ω_c

Answer: C



Watch Video Solution

19. A carrier wave of peak voltage 12 V is used to transmit a message signal. What should be the peak voltage of the modulating signal in order to have a modulation index of 75%?

A. 18 V

B. 22 V

C. 16 V

D. 28 V

Answer: C



Watch Video Solution

20. A single of 5 kHz frequency is amplitude modulated on a carrier wave of frequency 2 MHz. The frequencies of the resultant signal is/are :-

A. 2 MHz only

B. 2005 kHz and 1995 kHz

C. 2005 kHz, 2000 kHz and 1995 kHz

D. 2000 kHz and 1995 kHz

Answer: C



Watch Video Solution

21. The amplitude of carrier wave is 12 . For modulation index of 50% the amplitude of modulating signal is _____ V.

A. 3

B. 6

C. 12

D. 9

Answer: B



Watch Video Solution

22. The audio signal used to modulate $60 \sin(2\pi \times 10^6 t)$ is $15 \sin 300\pi t$. The depth of modulation is

A. 0.5

B. 0.4

C. 0.25

D. 0.15

Answer: C



Watch Video Solution

23. A message signal of 12 kHz and peak voltage 20 V is used to modulate a carrier wave of frequency 12 MHz and peak voltage 30

V. Calculate the (i) modulation index (ii) side-band frequencies.

A. 0.32

B. 6.7

C. 0.67

D. 67

Answer: C



Watch Video Solution

24. An oscillator is producing FM waves of frequency 2kHz with a variation of 10kHz .

What is modulating index?

A. 0.20

B. 5.0

C. 0.67

D. 1.5

Answer: B



Watch Video Solution

25. When carrier wave of 2.5 MHz frequency is amplitude modulated, the resulting AM wave has maximum of 15 V and minimum amplitude of 10 V. The modulation index is _____.

A. 0.3

B. 0.2

C. 0.1

D. 0.4

Answer: B



Watch Video Solution

26. The equation of an FM signal is $e = 6 \sin (10^6 t + 4 \sin 10^3 t)$. Then, the modulating frequency is

A. 1000 Hz

B. 500 Hz

C. 300 Hz

D. 159 Hz

Answer: D



27. The distance of coverage of a transmitting antenna is 12.8 km. Then the height of the antenna is (Given that radius of earth = 6400 km)

A. 6.4 m

B. 12.8 m

C. 3.2 m

D. 16 m

Answer: B



Watch Video Solution

28. If a transmitting antenna of height 105 m is placed on a hill, then its coverage area is

A. 4224 km^2

B. 3264 km^2

C. 6400 km^2

D. 4864 km^2

Answer: A



Watch Video Solution

29. A radio has a power of $1kW$ and is operating at a frequency of $10GHz$ it is located on a mountain top of height $500m$. The maximum distance upto which it can detect object located on the surface of the earth (Radius of earth $= 6.4 \times 10^6m$) is

A. 80 km

B. 16 km

C. 40 km

D. 64 km

Answer: A



Watch Video Solution

30. Height of T.V. Tower is h_T . The area of transmission of T.V. Waves is \propto _____ .

A. h_T^2

B. $h_T^{1/2}$

C. $h_T^{1/3}$

D. h_T

Answer: D



Watch Video Solution

31. In an amplitude modulated wave for audio frequency of 500 cycle / second, the appropriate carrier frequency will be

A. 50 cycles/ s

B. 100 cycles/s

C. 500 cycles/s

D. 50, 000 cycles/s

Answer: D



Watch Video Solution

32. A modem is a

A. modulating device only .

B. demodulating device only

C. modulating and demodulating device.

D. transmitting device.

Answer: C



Watch Video Solution

33. The electromagnetic wave of frequency 3 MHz to 30 MHz are

A. in ground wave propagation

B. in sky wave propagation

C. in microwave propagation

D. in satellite communication

Answer: B



Watch Video Solution

34. In which frequency range, space waves are normally propagated?

A. High frequency

B. Very high frequency

C. Ultra high frequency

D. Super high frequency

Answer: C



Watch Video Solution

35. Name the type of waves which are used for line of sight (LOS) communication. What is the range of their frequencies?

A transmitting antenna at the top of a tower

has a height of 20m and the height of the receiving antenna is 45m. Calculate the maximum distance between them for satisfactory communication in LOS mode.

(Radius of the Earth = 6.4×10^6 m)

A. sound waves

B. ground wave

C. sky waves

D. space waves

Answer: D



36. The ionosphere is used for the propagation of

- A. sky waves
- B. space waves
- C. ground waves
- D. All

Answer: A



37. The maximum frequency of transmitted radio waves above which the radio waves are no longer reflected back by ionosphere is (N = maximum electron density of ionosphere, g = acceleration due to gravity)

A. $9 N$

B. $9N^2$

C. $9\sqrt{N}$

D. $9^2 N_2$

Answer: C



Watch Video Solution

38. For sky wave propagation of a $10MHz$ signal, what should be the minimum electron density in ionosphere?

A. $12 \times 10^{12} m^{-3}$

B. $10^6 m^{-3}$

C. $10^{14} m^{-3}$

D. $10^{22} m^{-3}$

Answer: A



Watch Video Solution

39. A sky wave with a frequency 55 MHz is incident on D-region of earth's atmosphere at 45° , The angle of refraction is (electron density for D-region is 400 electron/c.c.)

A. 60°

B. 45°

C. 30°

D. 15°


Answer: B



Watch Video Solution

40. A diode detector is used to detect an amplitude modulated wave of 60% modulation by using a condense of capacity 250 picofarad in parallel with a load resistance 100 kilo ohm find the maximum modulated which could be find the maximum modulated

frequency which could be detected by it

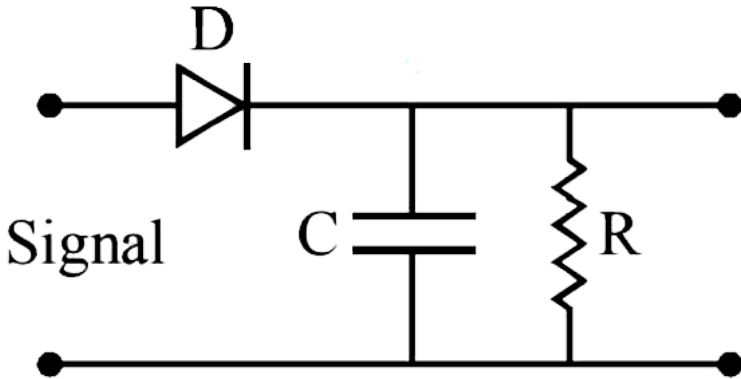

- A. 10. 62 MHz
- B. 10. 62 kHz
- C. 5. 31 MHz
- D. 5. 31 kHz

Answer: B



Watch Video Solution

41. A telephonic communication service is working at carrier frequency of 10 GHz. Only 10% of it is utilized for transmission. How many telephonic channels can be transmitted simultaneously if each channel requires a bandwidth of 5 kHz ?

A. 2×10^5

B. 2×10^6

C. 2×10^3

D. 2×10^4

Answer: A



Watch Video Solution

42. A transmitting antenna of height h and the receiving antenna of height 45 m are separated by a distance of 40 km of satisfactory communication in line of sight mode. Then the value of h is (given radius of earth is 6400 km)

A. 15 m

B. 20 m

C. 30 m

D. 25 m

Answer: B



Watch Video Solution

43. In optical communication system operating at 1200nm, only 2% of the source frequency is available for TV t ransmission having a

bandwidth of 5 MHz. the number of TV channels that can be transmitted is

- A. 2 million
- B. 10 million
- C. 0.1 million
- D. 1 million

Answer: D



Watch Video Solution

44. Assertion : Electromagnetic waves with frequencies more than the critical frequency of ionosphere cannot be used for communication using sky wave propagation.

Reason : The refractive index of the ionosphere becomes very high for frequencies higher than the critical frequency .

A. Assertion is True . Reason is True, Reason is a correct explanation for Assertion

B. Assertion is True , Reason is True, Reason

is not a correct explanation for Assertion

C. Assertion is True, Reason is False.

D. Assertion is False but, Reason is True .

Answer: B



Watch Video Solution

45. A message signal frequency ω_m is superposed on a carrier wave of frequency ω_c

to generate an amplitude modulated wave (AM). The frequency of the AM wave will be

A. equal to the amplitude of the carrier wave.

B. equal to the amplitude index of the carrier wave.

C. equal to the angular frequency of carrier wave .

D. equal to the modulation of the carrier wave.

Answer: C



Watch Video Solution

46. (a). Assertion (A) is true, Reason (R) is also true, Reason (R) is the correct explanation for assertion (A).

(b). Assertion (A) is true, Reason (R) is true, Reason (R) is not the correct explanation for Assertion (A).

(c). Assertion (A) is true, Reason (R) is false.

(d). Assertion (A) is false, Reason (R) is true.

Q. Assertion (A): to a solution of potassium chromate, if a strong acid is added, it changes its colour from yellow to orange.

Reason (R): The colour change is due to the change in oxidation state of potassium chromate.

A. Assertion is True, Reason is True, Reason is a correct explanation for Assertion

B. Assertion is True , Reason is True, Reason is not a correct explanation for Assertion

C. Assertion is True, Reason is False .

D. Assertion is False but, Reason is True.

Answer: B



Watch Video Solution

Evaluation Test

1. The critical frequency for sky wave propagation if maximum number density of electrons in ionosphere is $10^3 m^{-3}$ is

A. 300 kHz

B. 600 kHz

C. 900 kHz

D. 1 MHz

Answer: C



Watch Video Solution

2. Frequencies higher than 5 MHz are found not to be reflected by the ionosphere on a

particular day at a place. The maximum electron density of the ionosphere is

A. $3 \times 10^{11} m^{-3}$

B. $4 \times 10^{11} m^{-3}$

C. $5 \times 10^{11} m^{-3}$

D. $6 \times 10^{11} m^{-3}$

Answer: A



Watch Video Solution

3. ATV tower has a height of 150m. By how much the height of tower be increased to double its coverage range ?

A. 250 m

B. 350 m

C. 450 m

D. 500 m

Answer: C



Watch Video Solution

4. How much time is taken by an information to pass from one place to another at a distance of 60 km in space communication ?

A. $1 \times 10^{-3} \text{ s}$

B. $2 \times 10^{-3} \text{ s}$

C. $2 \times 10^{-4} \text{ s}$

D. $4 \times 10^{-4} \text{ s}$

Answer: C



Watch Video Solution

5. Amplitude modulation is useful for broadcastin in communication systems because

A. receiver complexity can be avoided .

B. it is more prone to noise, than other modulation systems

C. it requires less transmitting power .

D. no other modulation system can give the necessary bandwidth for faithful transmission .

Answer: A



Watch Video Solution

6. Assertion : Communication in UHF/ VHF regions can be established by space wave or tropospheric wave.

Reason : Communication in UHF/VHF regions is not limited to line of sight distance but can be achieved for very large distances

A. Assertion is True. Reason is True, Reason is a correct explanation for Assertion

B. Assertion is True, Reason is True, Reason is not a correct explanation for Assertion

C. Assertion is True, Reason is False .

D. Assertion is False, Reason is True.

Answer: C



Watch Video Solution

7. In satellite communication

1. The frequency used lies between 5 MHz and 10 MHz.
2. The uplink and downlink frequencies are different.
3. The orbit of geostationary satellite lies in the equatorial plane at an inclination of 0° .

In the above statements

A. Only (ii) and (iii)

B. All are true

C. Only (ii) true

D. Only (i) and (ii) true

Answer: A



Watch Video Solution

8. Assertion : A dish antenna is highly directional .

Reason : A dipole antenna is unidirectional.

A. Assertion is True, Reason is True, Reason is a correct explanation for Assertion

B. Assertion is True, Reason is True, Reason

is not a correct explanation for Assertion

C. Assertion is True, Reason is False .

D. Assertion is False, Reason is True.

Answer: C



Watch Video Solution

9. Assertion : Modulation index is the degree to which the carrier wave is modulated .

Reason : For the strong and clear reception,

the value of modulation index should be very small.

A. Assertion is True, Reason is True, Reason

is a correct explanation for Assertion

B. Assertion is True, Reason is True, Reason

is not correct explanation for Assertion

C. Assertion is True, Reason is False .

D. Assertion is False, Reason is True.

Answer: B



Watch Video Solution

10. In an amplitude modulated wave for audio frequency of 400 cycles/second, the proper carrier frequency will be

- A. 40 cycles/s
- B. 80 cycles /s
- C. 400 cycles/s
- D. 40,000 cycles/s

Answer: D



Watch Video Solution

11. The minimum voltage in an amplitude modulated wave is 3 V and maximum voltage 11 V . The % modulation index is

A. 22.07 %

B. 57.14 %

C. 81.21 %

D. 112.28 %

Answer: B



12. A 3000 kHz carrier is modulated with 500 Hz audio signals. The frequencies of first pair of side bands are

- A. 3500 kHz and 2500 Hz
- B. 500 Hz and 2500 kHz
- C. 3000.5 kHz and 2999 . 5 kHz
- D. 2000 . 6 kHz and 2000 kHz

Answer: C



Watch Video Solution

13. A sinusoidal carrier wave of frequency 1 MHz and amplitude 100 V is amplitude modulated by sinusoidal voltage of frequency 4 kHz producing 50% modulation. The frequencies of lower and upper side band terms are respectively,

A. 1000 kHz, 1100 kHz

B. 996 kHz, 1004 kHz

C. 990 kHz, 1010 kHz

D. 994 kHz, 1004 kHz

Answer: B



Watch Video Solution

14. The total population covered by the T . V . Tower of height 200 m, if the population density around the T . V tower is 10^3 km^{-2} is (Radius of the earth is $6.4 \times 10^6 \text{ m}$.)

A. 40 . 19 lakh

B. 78 .50 lakh

C. 20 . 19 lakh

D. 10 . 19 lakh

Answer: B



Watch Video Solution

15. The number of AM broadcast stations that can be accommodated in a band width of 200 kHz for the highest modulating frequency 10 kHz will be

A. 10

B. 5

C. 7

D. 12

Answer: A



Watch Video Solution